

**Perlick®** 24" SIGNATURE SERIES  
BEVERAGE CENTER



eco friendly  
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



Glass Door Model



Solid Door Model

MODELS	DESCRIPTION
HP24BS-4-1R/L	Indoor Signature Series Beverage Center Solid Stainless Steel Door
HP24BS-4-2R/L	Indoor Signature Series Beverage Center Solid Panel Ready Door
HP24BS-4-3R/L	Indoor Signature Series Beverage Center Stainless Steel Glass Door
HP24BS-4-4R/L	Indoor Signature Series Beverage Center Panel Ready Glass Door
HP24BO-4-1R/L	Outdoor Signature Series Beverage Center Solid Stainless Steel Door
HP24BO-4-2R/L	Outdoor Signature Series Beverage Center Solid Panel Ready Door
HP24BO-4-3R/L	Outdoor Signature Series Beverage Center Stainless Steel Glass Door
HP24BO-4-4R/L	Outdoor Signature Series Beverage Center Panel Ready Glass Door

**KEY PRODUCT FEATURES AND BENEFITS**

- 1000 BTU/hr capacity delivers industry’s most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provide superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (outdoor models only)

**Quick Features:**

- Wine and refrigerator shelves fully extend on vibration dampened, stainless steel ball-bearing glides; stainless steel wine shelves will not absorb odors over time
- Industry’s best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready doors to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero global warming potential
- Storage for up to 62 cans and 16 bottles of wine



**24" SIGNATURE SERIES  
BEVERAGE CENTER**

MODEL NUMBERS		HP24BS	HP24BO
MODEL DESCRIPTION		24" Indoor Beverage Center	24" Outdoor Beverage Center
ATTRIBUTES			
Perlick Anti-Condensation System		NO	YES
Energy Star Certified		YES	YES
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)
	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft. (L)		5.2 cu. ft.	5.2 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		203 lbs (92.08 kg.)	203 lbs (92.08 kg.)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	2.2 amps	2.2 amps
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Thermostat	Digital	Digital
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (50g)	R600a (50g)
	Expansion Device	Capillary Tube	Capillary Tube
	Temperature Settings F (C)	33° (0.5) - 48° (8.8) <b>Factory Set Point 36°(2.2°)</b>	33° (0.5) - 48° (8.8) <b>Factory Set Point 36°(2.2°)</b>
	Heat Rejection (at 75°F)	450 BTU/hr	450 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes
PLUMBING		None Required	None Required

*Installation Notes: To achieve 24" install depth, you must recess the outlet 7/8" into the wall directly behind the unit, or place electrical connection adjacent to the installation cavity.*

**ACCESSORIES**

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67991-L/R	Stacking Kit for HP24/HC24/HA24 models
66736	Caster Kit for HP24/HC24/HA24 models
67115-24	Wood Faces for Wine Shelves (7/pk)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com)




**24" SIGNATURE SERIES**  
**BEVERAGE CENTER**

CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
HP24BS-4-1L	HP24BS4C-00-SLF0B	Left	No
HP24BS-4-1R	HP24BS4C-00-SRF0B	Right	No
HP24BS-4-2L	HP24BS4C-00-PL00B	Left	No
HP24BS-4-2R	HP24BS4C-00-PR00B	Right	No
HP24BS-4-3L	HP24BS4C-00-TLF0B	Left	No
HP24BS-4-3R	HP24BS4C-00-TRF0B	Right	No
HP24BS-4-4L	HP24BS4C-00-RL00B	Left	No
HP24BS-4-4R	HP24BS4C-00-RR00B	Right	No
HP24BS-4-1LL	HP24BS4C-00-SLFLB	Left	Yes
HP24BS-4-1RL	HP24BS4C-00-SRFLB	Right	Yes
HP24BS-4-2LL	HP24BS4C-00-PL0LB	Left	Yes
HP24BS-4-2RL	HP24BS4C-00-PR0LB	Right	Yes
HP24BS-4-3LL	HP24BS4C-00-TLFLB	Left	Yes
HP24BS-4-3RL	HP24BS4C-00-TRFLB	Right	Yes
HP24BS-4-4LL	HP24BS4C-00-RL0LB	Left	Yes
HP24BS-4-4RL	HP24BS4C-00-RR0LB	Right	Yes
HP24BO-4-1L	HP24BO4C-00-SLF0B	Left	No
HP24BO-4-1R	HP24BO4C-00-SRF0B	Right	No
HP24BO-4-2L	HP24BO4C-00-PL00B	Left	No
HP24BO-4-2R	HP24BO4C-00-PR00B	Right	No
HP24BO-4-3L	HP24BO4C-00-TLF0B	Left	No
HP24BO-4-3R	HP24BO4C-00-TRF0B	Right	No
HP24BO-4-4L	HP24BO4C-00-RL00B	Left	No
HP24BO-4-4R	HP24BO4C-00-RR00B	Right	No
HP24BO-4-1LL	HP24BO4C-00-SLFLB	Left	Yes
HP24BO-4-1RL	HP24BO4C-00-SRFLB	Right	Yes
HP24BO-4-2LL	HP24BO4C-00-PL0LB	Left	Yes
HP24BO-4-2RL	HP24BO4C-00-PR0LB	Right	Yes
HP24BO-4-3LL	HP24BO4C-00-TLFLB	Left	Yes
HP24BO-4-3RL	HP24BO4C-00-TRFLB	Right	Yes
HP24BO-4-4LL	HP24BO4C-00-RL0LB	Left	Yes
HP24BO-4-4RL	HP24BO4C-00-RR0LB	Right	Yes



**24" SIGNATURE SERIES  
BEVERAGE CENTER**

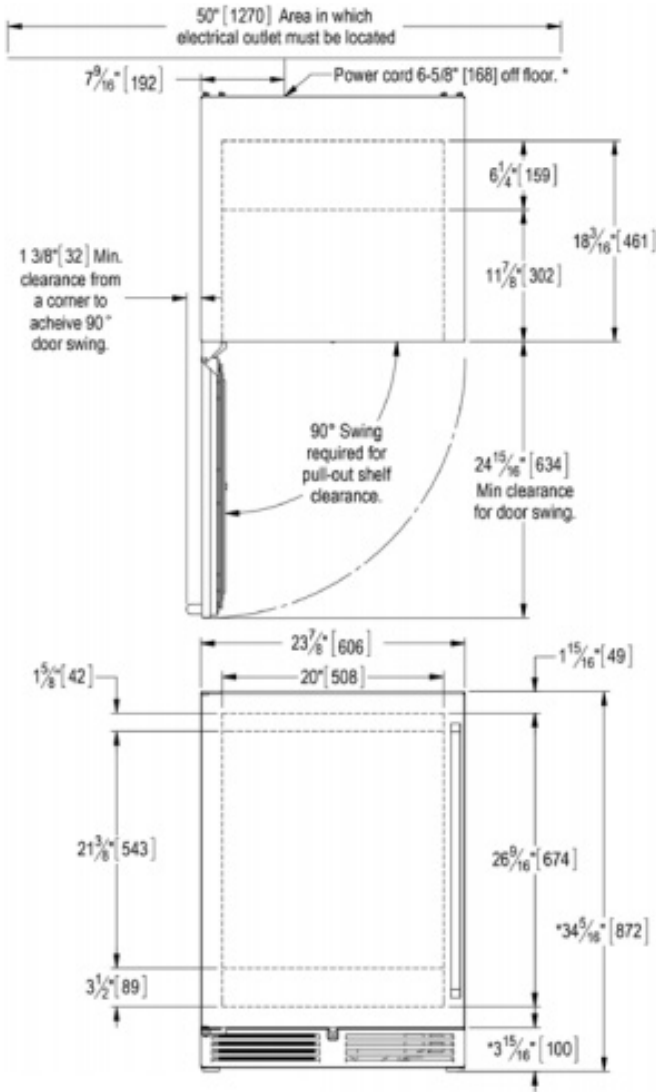

\* - Leg levelers can add 3/4" [19] to these dimensions when fully extended.

