



**24" SIGNATURE SERIES  
DUAL-ZONE WINE RESERVE**



**eco friendly**  
R600a Refrigerant



JOB	
AREA	
ITEM NO.	
MODEL NO.	



Glass Door Model



Solid Door Model

MODELS	DESCRIPTION
HP24DS-4-1R/L	Indoor Signature Series Dual Zone Wine Reserve Solid Stainless Steel Door
HP24DS-4-2R/L	Indoor Signature Series Dual Zone Wine Reserve Solid Panel Ready Door
HP24DS-4-3R/L	Indoor Signature Series Dual Zone Wine Reserve Stainless Steel Glass Door
HP24DS-4-4R/L	Indoor Signature Series Dual Zone Wine Reserve Panel Ready Glass Door
HP24DO-4-1R/L	Outdoor Signature Series Dual Zone Wine Reserve Solid Stainless Steel Door
HP24DO-4-2R/L	Outdoor Signature Series Dual Zone Wine Reserve Solid Panel Ready Door
HP24DO-4-3R/L	Outdoor Signature Series Dual Zone Wine Reserve Stainless Steel Glass Door
HP24DO-4-4R/L	Outdoor Signature Series Dual Zone Wine Reserve Panel Ready Glass Door

**KEY PRODUCT FEATURES AND BENEFITS**

- Patented dual zone technology allows you to store your red and white wines in separate temperature zones for precise storage conditions
- 1000 BTU/hr capacity delivers industry’s most energy efficient cool down; indoors or outdoors
- Up to 70% faster cooling speeds than leading competitor
- Variable speed compressor minimizes sound; up to 30% quieter than competitors
- Commercial-grade all stainless steel interior and exterior provide superior durability and easy cleaning
- Perlick Anti-Condensation System™ eliminates condensation from forming on the cabinet (outdoor models only)

**Quick Features:**

- Wine shelves fully extend on vibration dampened, stainless steel ball-bearing glides; stainless steel wine shelves will not absorb odors over time
- Industry’s best full 6 year warranty for owner ease of mind
- Available with stainless steel or panel ready doors to match your design style
- Audible door alarm warns user if door is held open
- Selectable blue or white LED lighting
- R600a Natural Refrigerant offers maximum energy efficiency with zero global warming potential
- Storage for up to 32 bottles of wine



**24" SIGNATURE SERIES**  
**DUAL-ZONE WINE RESERVE**

MODEL NUMBERS		HP24DS	HP24DO
MODEL DESCRIPTION		24" Indoor Dual Zone Wine Reserve	24" Outdoor Dual Zone Wine Reserve
ATTRIBUTES			
Perlick Anti-Condensation System		NO	YES
OVERALL DIMENSIONS	Width - in. (mm)	23-7/8" (606 mm.)	23-7/8" (606 mm.)
	Depth - in. (mm)	24" (610 mm.)	24" (610 mm.)
	Height - in. (mm)	34-1/4" (870 mm.)	34-1/4" (870 mm.)
OPENING DIMENSIONS	Width - in. (mm)	24" (610 mm.)	24" (610 mm.)
	Depth - in. (mm)	24-7/8" (632 mm.)	24-7/8" (632 mm.)
	Height - in. (mm)	34-1/2" (876 mm.)	34-1/2" (876 mm.)
INTERNAL VOLUME Net. Cu. Ft. (L)		5.2 cu. ft.	5.2 cu. ft.
SHIPPING WEIGHT Lbs. (kg.)		222 lbs (100.7 kg.)	222 lbs (100.7 kg.)
ELECTRICAL SPECIFICATIONS	Electrical Supply	115 VAC/60 Hz/1 Ph	115 VAC/60 Hz/1 Ph
	Running Load Amps	1.9 amps	1.9 amps
	Electrical Connection	Cord connected	Cord connected
	Cord Plug Type	NEMA 3 Prong 5-15P	NEMA 3 Prong 5-15P
	Cord Length	6'	6'
	Defrost Initiation	Automatic	Automatic
	Defrost Type	Off cycle	Off cycle
	Thermostat	Digital	Digital
REFRIGERATION SPECIFICATIONS	Refrigerant	R600a (45g)	R600a (45g)
	Expansion Device	Capillary Tube	Capillary Tube
	Temperature Settings F (C)	45°/ 51° (7.2/ 10.5) - 55°/ 65° (12.7/ 18.3) Factory Set Point 36°(2.2°)	45°/ 51° (7.2/ 10.5) - 55°/ 65° (12.7/ 18.3) Factory Set Point 36°(2.2°)
	Heat Rejection (at 75°F)	450 BTU/hr	450 BTU/hr
	Pull Down Capacity	1000 BTU/hr	1000 BTU/hr
	Front Vented	Yes	Yes
PLUMBING		None Required	None Required

*Installation Notes: To achieve 24" install depth, you must recess the outlet 7/8" into the wall directly behind the unit, or place electrical connection adjacent to the installation cavity.*

**ACCESSORIES**

MODEL NOS.	DESCRIPTION
(L)	Factory Installed Lock
67991-L/R	Stacking Kit for HP24/HC24/HA24 models
66736	Caster Kit for HP24/HC24/HA24 models
67115-24	Wood Faces for Wine Shelves (7/pk)

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com](http://perlick.com)




**24" SIGNATURE SERIES**  
**DUAL-ZONE WINE RESERVE**

CUSTOMER MODEL NUMBER	REGULATORY MODEL NUMBER	Hinge Side	Lock
HP24DS-4-1L	HP24DS4J-00-SLF0F	Left	No
HP24DS-4-1R	HP24DS4J-00-SRF0F	Right	No
HP24DS-4-2L	HP24DS4J-00-PL00F	Left	No
HP24DS-4-2R	HP24DS4J-00-PR00F	Right	No
HP24DS-4-3L	HP24DS4J-00-TLF0F	Left	No
HP24DS-4-3R	HP24DS4J-00-TRF0F	Right	No
HP24DS-4-4L	HP24DS4J-00-RL00F	Left	No
HP24DS-4-4R	HP24DS4J-00-RR00F	Right	No
HP24DS-4-1LL	HP24DS4J-00-SLFLF	Left	Yes
HP24DS-4-1RL	HP24DS4J-00-SRFLF	Right	Yes
HP24DS-4-2LL	HP24DS4J-00-PL0LF	Left	Yes
HP24DS-4-2RL	HP24DS4J-00-PR0LF	Right	Yes
HP24DS-4-3LL	HP24DS4J-00-TLFLF	Left	Yes
HP24DS-4-3RL	HP24DS4J-00-TRFLF	Right	Yes
HP24DS-4-4LL	HP24DS4J-00-RL0LF	Left	Yes
HP24DS-4-4RL	HP24DS4J-00-RR0LF	Right	Yes
HP24DO-4-1L	HP24DO4J-00-SLF0F	Left	No
HP24DO-4-1R	HP24DO4J-00-SRF0F	Right	No
HP24DO-4-2L	HP24DO4J-00-PL00F	Left	No
HP24DO-4-2R	HP24DO4J-00-PR00F	Right	No
HP24DO-4-3L	HP24DO4J-00-TLF0F	Left	No
HP24DO-4-3R	HP24DO4J-00-TRF0F	Right	No
HP24DO-4-4L	HP24DO4J-00-RL00F	Left	No
HP24DO-4-4R	HP24DO4J-00-RR00F	Right	No
HP24DO-4-1LL	HP24DO4J-00-SLFLF	Left	Yes
HP24DO-4-1RL	HP24DO4J-00-SRFLF	Right	Yes
HP24DO-4-2LL	HP24DO4J-00-PL0LF	Left	Yes
HP24DO-4-2RL	HP24DO4J-00-PR0LF	Right	Yes
HP24DO-4-3LL	HP24DO4J-00-TLFLF	Left	Yes
HP24DO-4-3RL	HP24DO4J-00-TRFLF	Right	Yes
HP24DO-4-4LL	HP24DO4J-00-RL0LF	Left	Yes
HP24DO-4-4RL	HP24DO4J-00-RR0LF	Right	Yes



**24" SIGNATURE SERIES**  
**DUAL-ZONE WINE RESERVE**

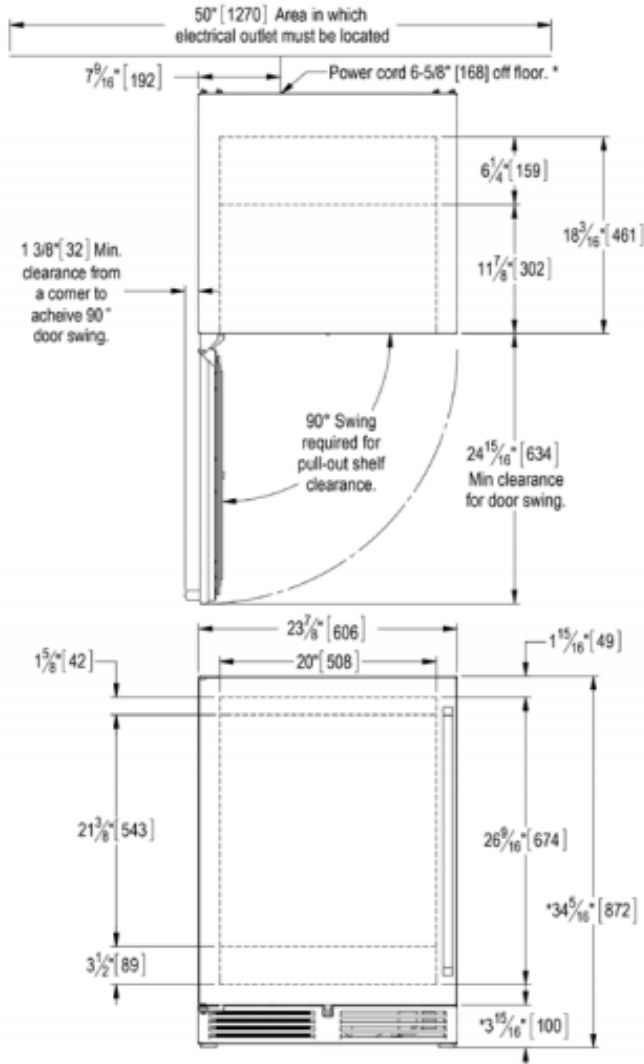

\* - Leg levelers can add 3/4" [19] to these dimensions when fully extended.

